

Water-activated paper tape

GUMMED KRAFT · PLAIN AND PRINTED · 70 MM

CP-TP-G70 70 mm × 200 m
CP-TP-P70 70 mm × 200 m, 2 colour

The case for paper tape is usually made on material grounds, and that case is true and is not the interesting part. The interesting part is that a seal which bonds into the board is the only kind that can tell you something after the fact. Every other closure on this catalogue is judged by whether the contents arrived. This one is judged by whether anyone can prove they were not looked at first.

SIX REASONS TO SPECIFY IT



TAMPER EVIDENCE

It cannot be opened quietly

A surface tape lifts and presses back down and nobody downstream knows. This one has gone into the liner, so it brings the liner with it and leaves a torn patch that cannot be tidied up.



CONSUMABLE COST

One strip where three were needed

A pressure-sensitive seal needs a strip down the seam and one along each edge, because it holds on surface tack alone. A bonded seam needs no help at the edges, so one strip closes the carton.



FAILURE RATE

Cold board, dusty board, damp air

Surface adhesives are fussy about what they land on: below ten degrees they go hard, and dust on a liner loses a seam. Water and starch do not care — the strip wets the board and dries in.



BRAND

The branded roll seals like the plain one

Two flexo colours go on the backing before the gum does, so the printed grade and the plain grade have the same bond, the same dispenser setting and the same route out. A branded parcel is not a different parcel.



CERTIFICATION

Listings resolved from the record

Every mark here is read out of the SKU record. CircleFibre 90 is held by both codes; the plain grade adds SoilSafe 180, the printed grade adds ChainMark. The sheets say so rather than averaging.



END OF LIFE

The carton recycles with the tape on it

There is no film, no laminate and no adhesive residue to strip off first. Backing, gum and core are paper and starch, so a sealed carton goes into kerbside paper collection whole, exactly as it arrived.

WHAT THE LISTINGS CERTIFY



CircleFibre 90

Post-consumer fibre content verified by mill declaration and lot sampling. The 90 is the threshold, not the score.

Held by every size



SoilSafe 180

Disintegrates in commercial composting inside 180 days at 58 °C, with no screening residue above 2 mm.

Held by CP-TP-G70



ChainMark

Fibre traced through every intermediary to managed regrowth forestry, audited annually.

Held by CP-TP-P70



CIRCLEFIBRE 90

ChainMark, SoilSafe 180 are held by some sizes only — see ordering

RECYCLED CONTENT

74% recycled by weight


Measured by weight against the backing and the gum as supplied. The band this figure falls into, and how it sits against the other three ways a pack is closed, is on the comparison sheet and not repeated here. Figures are inferred, provisional and not yet independently certified.

WARRANTY

Term	Twelve months from despatch, unopened and dry
Covers	Gum coverage, backing weight, roll length and bond failure on uncoated kraft
Verified per lot	Backing weight, gum coat weight, roll length, fibre tear
Excludes	Damp storage, coated or waxed board, and seals pulled before cure
Status of figures	Inferred, provisional, not independently certified




Three-quarter

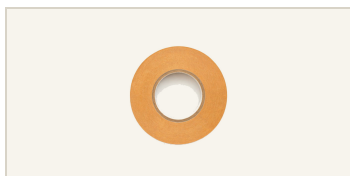

Top



Side

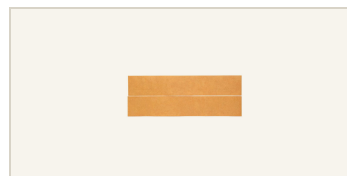

Flat strips